


25x25x4mm active ceramic antenna

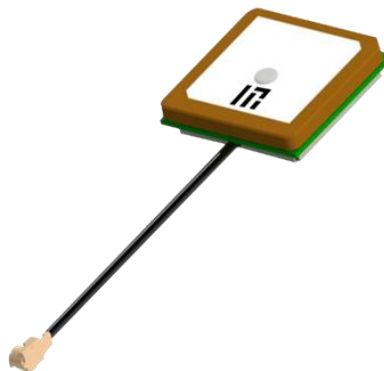

Product Description

This product can be used as various GPS receivers navigation, GPS clock, positioning.

Part No.	Weight	Dimensions (L x W x H)	cable	Connector	Color
M04-0102600R0A		25*25*8.2mm	Φ 1.13*49mm	IPX1	natural color

OVERALL PERFORMANCE(Antenna Element, LNA & Cable)

CHARACTERISTICS	SPEC
Center Frequency	1575.42±2MHz&1561MHz±2MHz
Voltage	DC 3.0±0.3V
Current	12mA max
Gain	28dB typ
Noise Figure	2.0dB max
Bandwidth(10dB return loss)	10MHz min
Output VSWR	2.0 max
Output Impedance	50ohm
Dimensions	25mm(L)×25mm(W)×7.5mm(H) typ
Weight	10±2g(typ)
Cable	70±2mm (Φ=1.13mm)
Connector	IPEX1

Patch antenna

CHARACTERISTICS	SPEC
Dimensions	25mm(L)×25mm(W)×4mm(H) typ
Center Frequency	1575.42±1MHz(50mm(L)×50mm(W) Ground)

MyAntenna RF Technology Co., Ltd

ADD: No.RM 405, R3-A Building, Shenzhen High-Tech Park, Nanshan, Shenzhen, P.R. China.

TEL: +86-0755-86503881 FAX: +86-0755-27801677 E-mail: nfc@myantenna.com

Bandwidth(10dB return loss)	10MHz min
Peak Gain	2.5dB typ
Output V.S.W.R	2.0dB max
Output Impedance	50ohm
Polarization	R.H.C.P

LNA/Filter

CHARACTERISTICS	SPEC
Voltage	DC 3.0±0.3V
Current	12mA max
Center Frequency	1575.42±1MHz
Gain	27±2dB typ
Noise Figure	1.5dB max
Filter(Out of band attenuation)	SAW filter 30dB min fo±60MHz (fo=1575.42MHz)
Output V.S.W.R	2.0 max

OPERATING CONDITION

Temperature	-20℃ to +65℃
Humidity	10% to 95% RH

STORAGE CONDITION

Temperature	-20℃ to +70℃
Humidity	10% to 95% RH

Note

- 1、 This product specification guarantees the quality of our product as a single unit. Please make sure that your product is evaluated and confirmed against your specifications when our product is mounted to your product.
- 2、 We cannot warrant against failure caused by any use of our product that deviates from the intended use as described in this product specification.
- 3、 The product will get free warranty for three months since the date of purchase users operate in the correct way; users will have to pay cost of the materials and maintaining fee out of the condition.
- 4、 Electrostatic sensitive device Observe precautions for handling.

HOUSING CONFIGURATIONS

